




## 4 Conductor Solid CL2R Rated Thermostat Cable

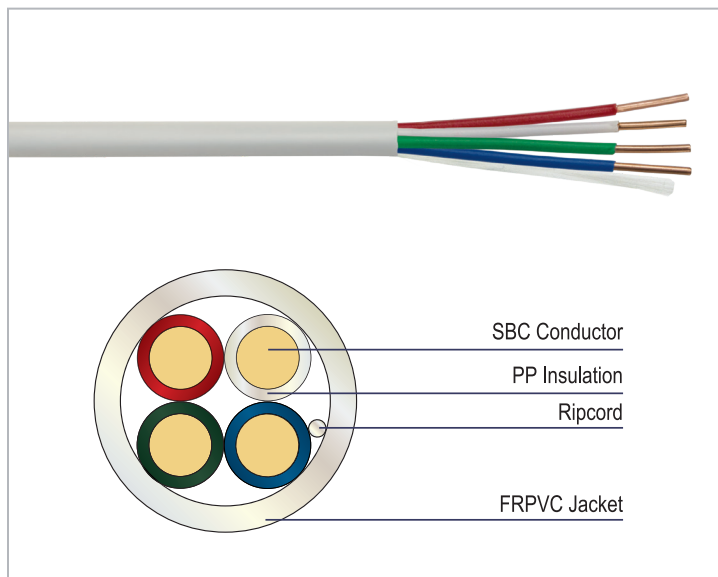

### Applications

Vericom 4 conductor solid CL2R rated thermostat cable supports in-wall use and certain low-voltage applications. This cable is ideal for class 2 remote-control, signaling, and power-limited circuits and is suitable for in-wall installation in multi-story commercial building or residential environments.

### Description / Specifications

This 4 conductor solid CL2R rated thermostat cable is offered in 20 AWG or 18 AWG and is composed of 4 wires (Red, White, Green, Blue) inside an In-Wall Riser rated jacket. This cable is approved for 150 volts and has a temperature range of -20°C to 60°C. Our thermostat cables are CMR and CL2R and meet UL 1685 Vertical Tray, which are perfect for commercial installation in vertical floor-to-floor runs, where the length exceeds one story.

### Features & Benefits

- CL2R rated jacket for in-wall residential or commercial installations in vertical floor-to-floor runs, where the length exceeds one story
- UL Listed and RoHS compliant to ensure safety requirements are met
- Offered in 20 AWG or 18 AWG solid copper conductor to suit your specific application
- Spool packaging to ease installation and storage

### Standards Compliance

- UL 1685 Vertical Tray and UL 1666
- UL Standard 13, Power Limited Circuit Cable
- UL Listed Type CL2R and CMR
- NEC Article 725
- RoHS Compliant



## 4 Conductor Solid CL2R Rated Thermostat Cable

### Ordering Information

Description				
Item No.	Conductor	Packaging	Cable Weight	Color
<b>4 Conductor Solid Riser Rated Thermostat Cable</b>				
HT184-04429	18 AWG	250 ft Spool	7.8 lb / 250 ft	White
HT184-02547	18 AWG	500 ft Spool	15.6 lb / 500 ft	White
HT184-04169	18 AWG	1000 ft Spool	31 lb / 1000 ft	White
HT204-02558	20 AWG	500 ft Spool	10.15 lb / 500 ft	Brown

VERICOM E364604 **XX** AWG 4C 60 °C (UL) TYPE CL2R ---  
CMR SUNLIGHT RESISTANT

For accurate cable marking, replace the **XX** with the appropriate wire gauge.

### Cable Marking

#### 18 AWG Construction

**Conductor Material:** 18 AWG 4C Solid Bare Copper  
**Conductor Diameter:** 0.040 in. (1.024 mm)  
**Insulation Material:** Polypropylene (PP)  
**Insulation Thickness:** 0.008 in. (0.203 mm)  
**Insulation Diameter:** 0.057 in. (1.45 mm)  
**Insulation Color Code:** Red, White, Green, Blue

**Ripcord:** Nylon

**Jacket Material:** Sunlight Resistant Polyvinyl Chloride (SRPVC)

**Jacket Thickness:** 0.016 in. (0.41 mm)

**Jacket Color:** Specified By Item Number

**Jacket Diameter:** 0.173 in. (4.40 mm)

#### 20 AWG Construction

**Conductor Material:** 20 AWG 4C Solid Bare Copper  
**Conductor Diameter:** 0.032 in. (0.812 mm)  
**Insulation Material:** Polypropylene (PP)  
**Insulation Thickness:** 0.008 in. (0.203 mm)  
**Insulation Diameter:** 0.057 in. (1.45 mm)  
**Insulation Color Code:** Red, White, Green, Blue

**Ripcord:** Nylon

**Jacket Material:** Sunlight Resistant Polyvinyl Chloride (SRPVC)

**Jacket Thickness:** 0.016 in. (0.41 mm)

**Jacket Color:** Specified By Item Number

**Jacket Diameter:** 0.142 in. (3.61 mm)

### Electrical

Characteristics	18 AWG	20 AWG
Nominal Mutual Capacitance	25 Pf/m	22 Pf/m
Nominal Conductor DC Resistance (DCR@20°C)	6.5 Ω/1000 ft	10.3 Ω/1000 ft
Voltage Rating	150V	150V

### Environmental Conditions

**Operating Temperature:** -4 °F to 140 °F (-20 °C to 60 °C)