

Beam Clamp J-Hook



Description


Vericom's Beam Clamp J-Hooks provide a stable and secure attachment to steel beams for overhead routing of structured cabling in commercial and industrial environments.

Installation is simple and requires no drilling or welding.

- No drilling required – installs directly onto beam flanges for fast and secure attachment (setscrew must be tightened and torqued onto the sloped side of the I-beam)
- The wide, smooth, beveled base helps prevent sharp bends, stress, and kinks that can damage sensitive data cables to help ensure network performance
- Constructed from high-quality galvanized steel for long-lasting performance and excellent corrosion resistance in a wide range of indoor and outdoor conditions
- J-Hooks and Beam Clamps are packaged together in a box for field assembly and can be used with or without the Beam Clamp depending on the application

Features

- 3/4" jaw fits a wide range of beam flange thicknesses
- Provides support for CAT5e, CAT6, CAT6A, and other low-voltage cables
- High-quality galvanized steel
- Maximum load up to 60 lbs.
- Available sizes: 3/4", 1-5/16", 2", and 4"
- Includes retainer clip (except 3/4")
- JHB07, JHB13, and JHB20 include 50 J-Hooks, 50 Beam Clamps, and 50 screws
- JHB40 includes 25 J-Hooks, 25 Beam Clamps, and 25 screws

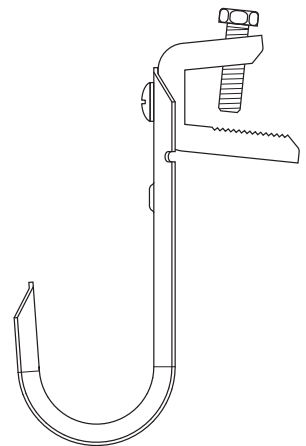

| ITEM NUMBER | DESCRIPTION | DIA. | HEIGHT | WIDTH | CAPACITY | |
|-------------|--|---------|--------------|-------------|----------|------|
| | | | | | CAT5e | CAT6 |
| JHB07 | 3/4" Beam Clamp J-Hook | 3/4" | 3.12 [79.3] | 0.87 [22.0] | 16 | 10 |
| JHB13 | 1 5/16" Beam Clamp J-Hook w/Retaining Clip | 1 5/16" | 4.22 [107.3] | 1.34 [34.1] | 50 | 30 |
| JHB20 | 2" Beam Clamp J-Hook w/Retaining Clip | 2" | 4.65 [118.0] | 1.38 [35.0] | 80 | 50 |
| JHB40 | 4" Beam Clamp J-Hook w/Retaining Clip | 4" | 7.01 [178.0] | 1.93 [49.0] | 300 | 185 |

dimensions in inches [millimeters]