




CAT6 Keystone Coupler Patch Panel 24 Port

Product Specifications

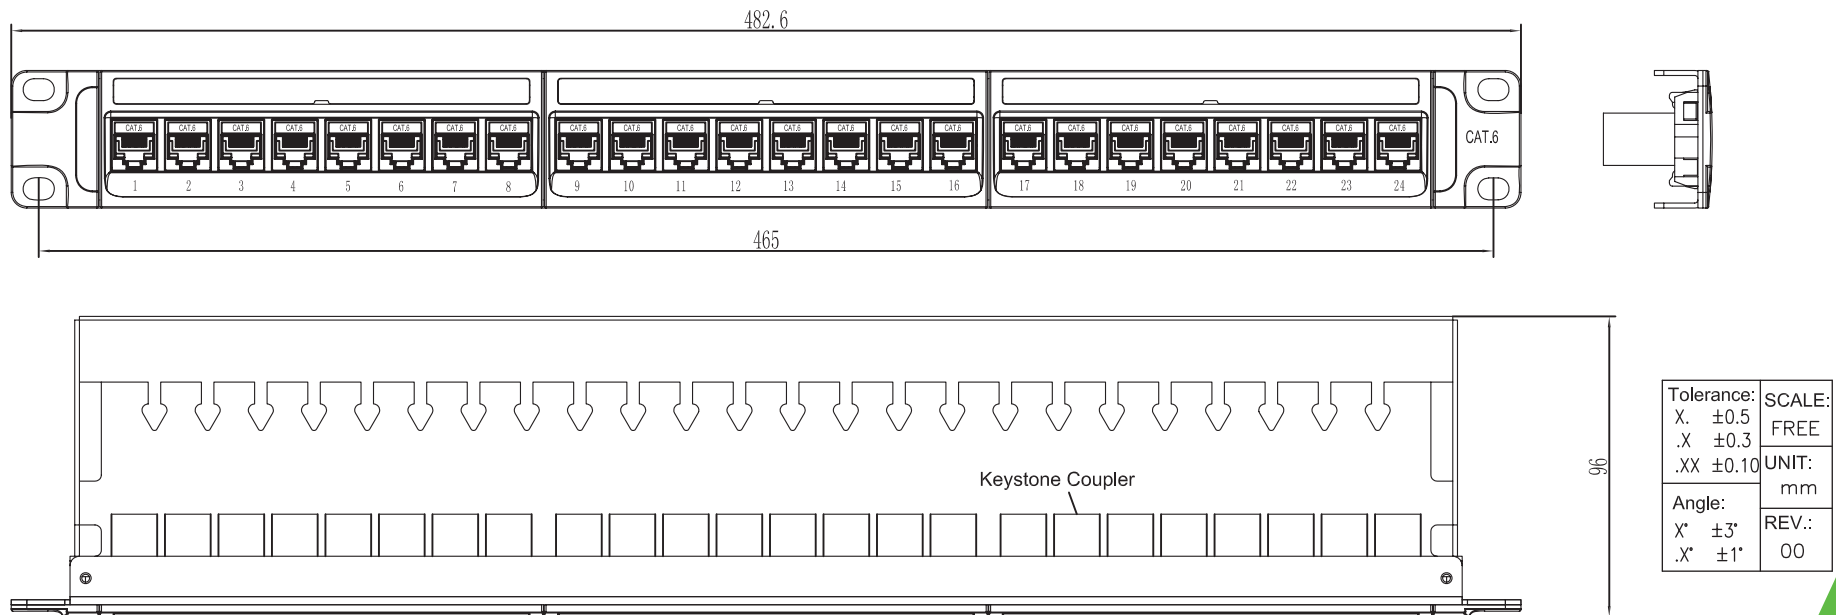

Specification:

Material:

- 1.Metal frame: SPCC.
2. Plastic Housing :ABS
- 3.RJ45 contact area : Gold plated.

Performance:

- a.combine two wirings of T568A & T568B.
- b.Insertion Force: 900 gms for 8 contacts.
- c.Retention Strength: 7.7 kgs between Jack and Plug.
- d.Operation Temperature: -30° to 60° .

e.Durability:

- e-1. Jack : 750 cycles Plug-Jack mating and unmating test, Insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
- f.The Cat.6 performance is in compliance with the ANSI/TIA/EIA 568 C.2 standard.

VERICOM PART NUMBER	AVAILABLE COLOR
MPP6U-01363	Black

NOTE: TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

© 2025 VERICOM Global Solutions

info@vericomsolutions.com • www.vericomsolutions.com