



PACKING

1 PC IN A ZIP BAG




***Note: All relevant materials are complied with RoHS directive.**

7	TRANSPARENT COIL CABLE TIE, LENGTH 40mm	1
6	L/N WITH TRANSPARENT LABEL 20*20mm	1 SET
5	SC/APC SM/ GREEN HOUSING/ BOOT COLOR: GREEN	1
4	LC/UPC SM/ HOUSING / COLOR: BLUE/ BOOT COLOR: BLUE TUBE COLOR: YELLOW	1 SET
3	SM, SX/ UL, G652D, OD1.8 mm, OFNR, CORNING, JACKET YELLOW (PT123C). DRAWING NO. EQ00601C-023	L + 100mm
2	SC/APC SM/ 1.0	1
1	LC/UPC SM/ 1.0	1

CABLE MARKING

VERICOM OPTICAL FIBER CABLE (UL) E519838 TYPE OFNR 70°C RISER CABLE 1.8mm OS1/OS2 TIA-568-C.3 ROHS COMPLIANT BATCH NO XXM

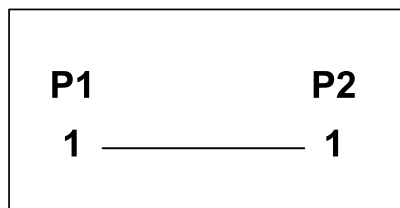

No.	COMPONENT DESCRIPTION		Quantity
APPROVED		VERICOM®	UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm
CHECKED			
DRAWING	TITLE	OPTICAL FIBER CABLE	
DATE	ITEM NO.	PC1A2U1118RYE**M	
	CHECKED		UNIT: mm

Length (L)	Bag	Quantity
1M	150*240*0.08mm	450
2M	150*240*0.08mm	350
3M	150*240*0.08mm	300
4M	150*240*0.08mm	300
5M	150*240*0.08mm	250
6M	150*240*0.08mm	250
7M	150*240*0.08mm	200
8M	150*240*0.08mm	200
9M	150*240*0.08mm	150
10M	150*240*0.08mm	150

TRANSMISSION PERFORMANCE

Meets or exceeds ISO/IEC 11801, TIA/EIA-568-C.3,
TIA-604-10 (FOCIS-10)

MECHANICAL


Connector Insertion Loss : 0.30dB max.
APC Connector Return Loss: 65dB Min.
UPC Connector Return Loss: 55dB Min.
Connector Durability : 500 Cycles

PHYSICAL

Storage and shipping temperature: -40°C to 70°C
Operating and installation temperature: -20°C to 70°C

NOTE:

All relevant materials are RoHS Compliant.

APPROVED				UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm	
CHECKED					
DRAWING		TITLE	OPTICAL FIBER CABLE		
DATE	0713/21	ITEM NO.	PC1A2U1118RYE**M		
CHECKED		UNIT: mm	