




PACKING
1 PC IN A ZIP BAG



CABLE MARKING

VERICOM OPTICAL FIBER CABLE (UL) E519838 TYPE OFNR 70°C RISER CABLE 1.8mm OS1/OS2 TIA-568-C.3 ROHS COMPLIANT BATCH NO XXM

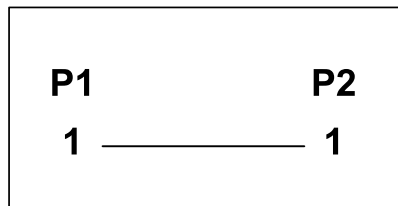

***Note: All relevant materials are complied with RoHS directive.**

7	TRANSPARENT COIL CABLE TIE, LENGTH 40mm	1	
6	L/N WITH TRANSPARENT LABEL 20*20mm	1	
5	SC/APC SM / GREEN HOUSING / BOOT COLOR: GREEN	1	
4	LC/APC SM/ HOUSING COLOR: GREEN / BOOT COLOR: GREEN TUBE COLOR YELLOW	1 SET	
3	SM, SX/ UL, G652D, OD1.8 mm, OFNR, CORNING, JACKET YELLOW (PT123C), DRAWING NO. EQ00601C-023	L + 100mm	
2	SC/APC SM/ 1.0	1	
1	LC/UPC SM/ 1.0	1	
No.	COMPONENT DESCRIPTION	Quantity	
APPROVED		UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm	
CHECKED			
DRAWING	TITLE		OPTICAL FIBER CABLE
DATE	ITEM NO.		PC2A1A1118RYE**M
		UNIT: mm	

Length (L)	Bag	Quantity
1M	150*240*0.08mm	450
2M	150*240*0.08mm	350
3M	150*240*0.08mm	300
4M	150*240*0.08mm	300
5M	150*240*0.08mm	250
6M	150*240*0.08mm	250
7M	150*240*0.08mm	200
8M	150*240*0.08mm	200
9M	150*240*0.08mm	150
10M	150*240*0.08mm	150

TRANSMISSION PERFORMANCE

Meets or exceeds ISO/IEC 11801, TIA/EIA-568-C.3,
TIA-604-10 (FOCIS-10)

MECHANICAL

Connector Insertion Loss : 0.30dB max.

Connector Return Loss : 65dB min.

Connector Durability : 500 Cycles


PHYSICAL

Storage and shipping temperature: -40°C to 70°C

Operating and installation temperature: -20°C to 70°C

NOTE:

All relevant materials are RoHS Compliant.

APPROVED				UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm	
CHECKED					
DRAWING		TITLE	OPTICAL FIBER CABLE		
DATE	03/02/21	ITEM NO.	PC2A1A1118RYE**M		
	CHECKED		UNIT: mm	