



**PACKING**

1 PC IN A ZIP BAG



**CABLE MARKING**

VERICOM OPTICAL FIBER CABLE (UL) E519838 TYPE OFNP 70°C PLENUM CABLE 1.8mm OM4 TIA-568-C.3 ROHS COMPLIANT BATCH NO XXM

<b>P1</b>		<b>P2</b>
<b>1</b>	_____	<b>1</b>
<b>2</b>	_____	<b>2</b>

**\*Note: All relevant materials are complied with RoHS directive.**

5	TRANSPARENT COIL CABLE TIE, LENGTH 40mm	1			
4	L/N WITH TRANSPARENT LABEL 20*20mm	1			
3	LC/UPC MM UNIBOOT / ERIKA VIOLET HOUSING / BOOT COLOR: WHITE STOPPER RED & BLACK / COMMUTATIVE POLARITY/ PUSH-PULL	2 SET			
2	MM, DX/ OFNP, OM4, 50/125, OD1.8mm, CORNING FIBER, Erika Violet (RAL4003).	L + 100MM			
1	LC/UPC MM/ 4.0	4			
No.	COMPONENT DESCRIPTION	Quantity			
APPROVED		<p>UNLESS OTHERWISE SPECIFIED: TOLERANCES</p> <p>0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm</p>			
CHECKED					
DRAWING	TITLE <b>OPTICAL FIBER CABLE</b>				
DATE	03/11/24	ITEM NO.	<b>PP08U40218PEV**M</b>	UNIT: mm	

## POLARITY CONVERSION:




1. GRIP END OF CONNECTOR



2. PULL BOOT AWAY FROM CONNECTOR



3. OPEN THE COVER

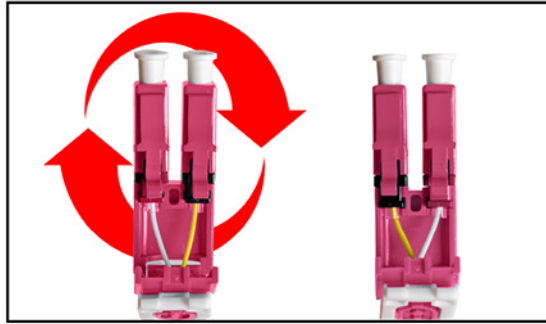

4. SWITCH POLARITY



5. CLOSE THE COVER



6. PUSH BOOT ON TO CONNECTOR



7. FINISH

Length (L)	Bag	Quantity
1M	150*240*0.08mm	400
2M	150*240*0.08mm	300
3M	150*240*0.08mm	250
5M	150*240*0.08mm	200
7M	150*240*0.08mm	140
10M	150*240*0.08mm	120
15M	170*290*0.08mm	70

### TRANSMISSION PERFORMANCE

Meets or exceeds ISO/IEC 11801, TIA/EIA-568-C.3, TIA-604-10 (FOCIS-10)

### MECHANICAL

Connector Insertion Loss : 0.35dB max. (LC Multimode)

Connector Return Loss : 35dB min. (OM4)

Connector Durability : 500 Cycles


### PHYSICAL

Storage and shipping temperature: -40°C to 70°C

Operating and installation temperature: -20°C to 70°C

### NOTE:

All relevant materials are RoHS Compliant.

APPROVED				UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm	
CHECKED					
DRAWING		TITLE	OPTICAL FIBER CABLE		
DATE	03/11/24	ITEM NO.	PP08U40218PEV**M		UNIT: mm

