

CABLE MARKING

VERICOM (UL) c(UL) E346149-C TYPE CM 75°C 24AWG 4P ROHS
 COMPLIANT CAT6A U/UTP PATCH CABLE ANSI/TIA-568.2-D ISO 11801

TRANSMISSION PERFORMANCE


The plug is compliant with UL 1863 & IEC 60603-7 & ANSI/TIA-1096-A (formerly FCC Part 68)
 The whole cable assembly will be 100% wire map tested
 PoE Compliance: Rated for 750 cycles with IEEE 802.3af/802.3at (48 cables in a bundle) and 802.3bt type 3 and type 4 (24 cables in a bundle) PoE applications



PHYSICAL

Storage temperature: -10°C to 75°C
 Operating temperature: -10°C to 75°C

***Note: All relevant materials are complied with RoHS directive.**

Color	Length (ft)	Quantity
BLUE (RAL5012)	1	450
WHITE (RAL9010)	3	230
BLACK (RAL9004)	5	170
GRAY (Cool Gray 8C)	6	160
YELLOW (RAL1021)	7	140
RED (PT1795C)	10	90
ORANGE (PT158C)	15	70
PURPLE (PT2756U)	20	50
PINK (PT16-1731 TCX)	25	45
GREEN (RAL6016)	30	40

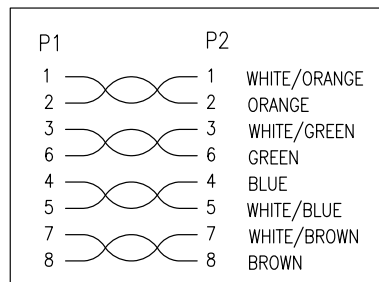

3	Molded PVC Transparent	2	
2	4 TWISTED PAIRS CAT.6A 24AWG Strand UTP WITH CROSS, OD 6.9 mm, JACKET SEE LIST. DRAWING NO. EU002404P-1126	L + 20mm	
1	8P8C MODULAR PLUG (UL94-V0), GOLD PLATING 50u" ON CONTACTS, Triplex (UL94-V0)	2	
No.	COMPONENT DESCRIPTION	Quantity	
APPROVED		UNLESS OTHERWISE SPECIFIED: TOLERANCES 0 ~ 200 mm ± 10 mm 201 ~ 1000 mm ± 20 mm 1001 ~ 1500 mm ± 25 mm 1501 ~ 2100 mm ± 30 mm 2100 ↑ ± 40 mm	
CHECKED			
DRAWING	TITLE	VGS6A™ CAT6A UTP PATCH CABLE	
DATE	06/14/20	ITEM NO.	RC6600XXF-MYY
		UNIT: mm	

CHECKED