



VGS6A™ Shielded CAT6A RJ45 Keystone Jack



Applications

The Vericom VGS6A™ Shielded Category 6A RJ45 Keystone Jacks support 10GBASE-T, 1000BASE-T (Gigabit Ethernet), 100BASE-T (Fast Ethernet), 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM, Digital video and broadband/baseband analog video, Voice over Internet Protocol (VoIP) and is backwards compatible with Category 5e systems. Compatible with IEEE 802.3af/802.3at (48 cables in a bundle) and 802.3bt type 3 and type 4 (24 cables in a bundle) PoE applications.

Description / Specifications

The Vericom VGS6A™ Shielded Category 6A RJ45 Keystone Jacks are designed to meet and exceed ANSI/TIA-568.2-D Category 6A and ISO 11801 Class E electrical performance requirements for frequencies up to 500 MHz. These shielded keystone jacks are designed to manage crosstalk to provide superior performance with headroom for even the toughest installs. These VGS6A™ Shielded Keystone Jacks provide a standard RJ-45 interface, contacts with minimum 50 microinches of gold, and a standard 110 punchdown for terminating horizontal cable.

Available in white with shielding but additional colors are available by special order. To maximize system performance, combine with Vericom patch panels, patch cords, and bulk cable.

Features & Benefits

- Contacts provide minimum 50 microinches of gold plating for maximum system reliability.
- Zinc Alloy Die Casted Housing and Clip integrate with shielded cables to provide a conductive path to ground to eliminate external noise.
- Universal label shows T568A and T568B wiring for ease of use.
- 110 IDCs are technician friendly with a standard punchdown tool.
- Vericom NT1001 can be used for quick termination of all 8 conductors simultaneously.
- Vericom VGS6A™ Shielded Jacks can be installed with many shielded category 6 cables including but not limited to: S/FTP, F/UTP, and U/FTP.
- Supports PoE/PoE+ over 100 meter channels with 10 meters of 24 AWG patch cords included in the channel.
- Strain relief cap secures conductors and makes the installation more robust.
- Available in white with shielding. Additional colors are available by special order.

Standards Compliance

- UL Listed
- TIA/EIA-568.2-D
- RoHS Compliant
- IEC 61156-5
- ISO/IEC 11801
- UL 1863 and CAN/CSA-C22.2
- ANSI/TIA-1096-A (formerly FCC Part 68)
- Supports IEEE 802.3AF/802.3AT (48 cables in a bundle) and 802.3bt type 3 and type 4 (24 cables in a bundle) PoE applications

Related Products

VGS™ One Step Termination Tool

Item No. NT1001





VGS6A™ Shielded CAT6A RJ45 Keystone Jack

Ordering Information

Item Number	Description
SPG6618WH	Shielded CAT6A RJ45 Keystone Jack

Construction

Housing: High impact thermoplastic, UL94V-0 fire retardant

Shielding: Zinc Alloy Die Casted Housing and Clip

IDC: 110 type, phosphor bronze alloy with 100 µin 100% tin alloy

Contacts: Phosphor bronze alloy plated with 50 µin of gold over of nickel plating

Mechanical

Plug Retention: 50 N (11 lbf)

Mating Life Cycle: Min 750 cycles

Wire Compatibility: 22 to 24 AWG (0.644 to 0.511 mm)

Environmental Conditions


Operating Temperature: 14 °F to 140 °F (-10 °C to 60 °C)

Storage Temperature: -40 °F to 158 °F (-40 °C to 70 °C)

Transmission Performance (at 20 °C)

Freq. (MHz)	IL Max. (dB)	NEXT Min. (dB)	FEXT Min. (dB)	RL Min. (dB)	PSANEXT Min. (dB)	PSAACRF Min. (dB)	Balanced TCL Min. (dB)
1.00	0.10	75.00	75.00	30.00	70.50	67.00	40.00
4.00	0.10	75.00	71.00	30.00	70.50	67.00	40.00
8.00	0.10	75.00	65.00	30.00	70.50	67.00	40.00
10.00	0.10	74.00	63.10	30.00	70.50	67.00	40.00
16.00	0.10	69.90	59.00	30.00	70.50	67.00	40.00
20.00	0.10	68.00	57.10	30.00	70.50	67.00	40.00
25.00	0.10	66.00	55.10	30.00	70.50	67.00	40.00
31.25	0.11	64.10	53.20	30.00	70.50	67.00	39.10
62.50	0.16	58.10	47.20	30.00	70.50	67.00	32.10
100.00	0.20	54.00	43.10	28.00	70.50	67.00	28.00
200.00	0.28	48.00	37.10	22.00	64.50	61.00	22.00
250.00	0.32	46.00	35.10	20.00	62.50	59.00	20.00
300.00	0.35	42.90	33.60	18.50	61.00	57.50	18.50
400.00	0.40	37.90	31.10	16.00	58.50	55.00	16.00
500.00	0.45	34.00	29.10	14.00	56.50	53.00	14.00

Technical Illustration

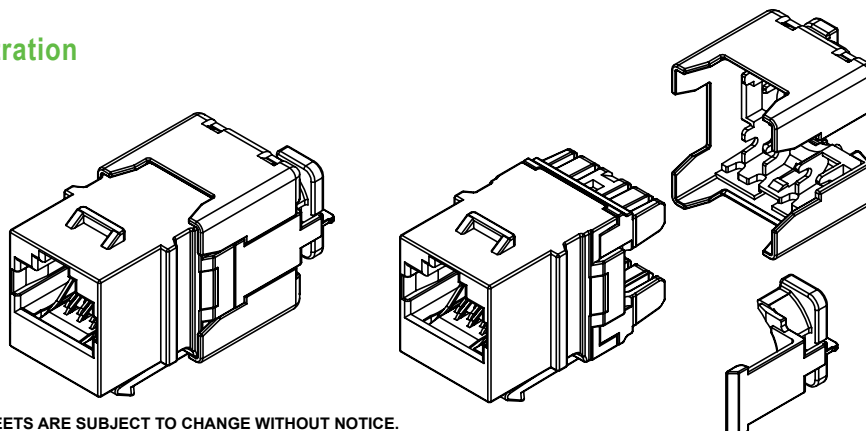

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20230810.3