

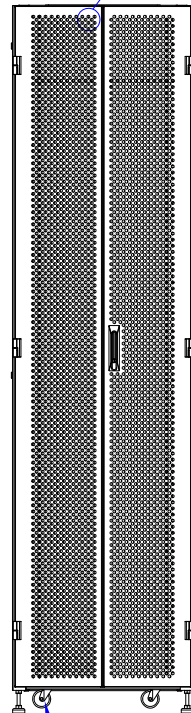



TOP VIEW

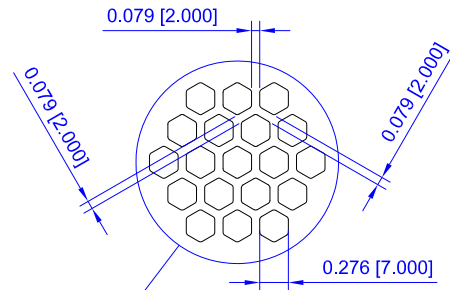


BACK VIEW

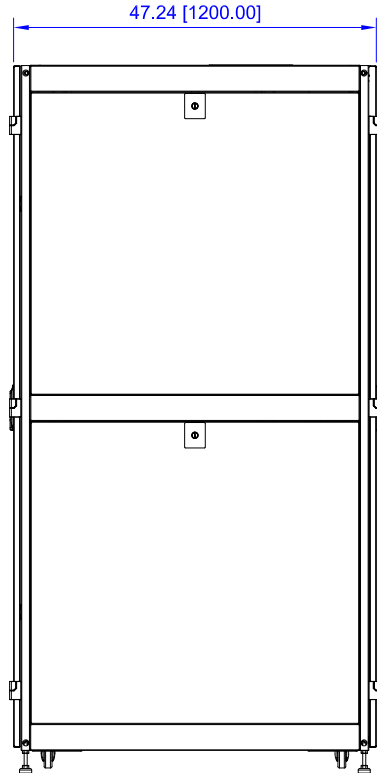

SIDE VIEW

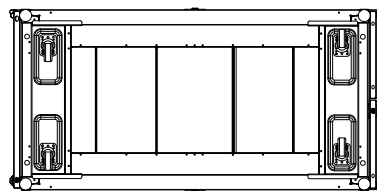


BOTTOM VIEW

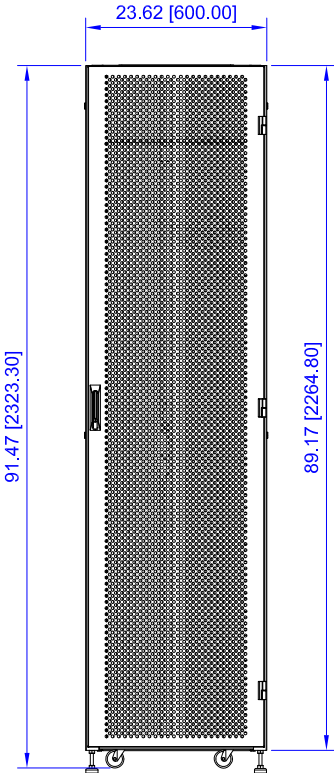

FRONT VIEW


COMPLIANCE	ANSI/EIA RS-310D IEC60297-2 DIN41494; Part 1 DIN41494; Part 7 UL 2416
LOADING CAPACITY	3,000 lbs static load

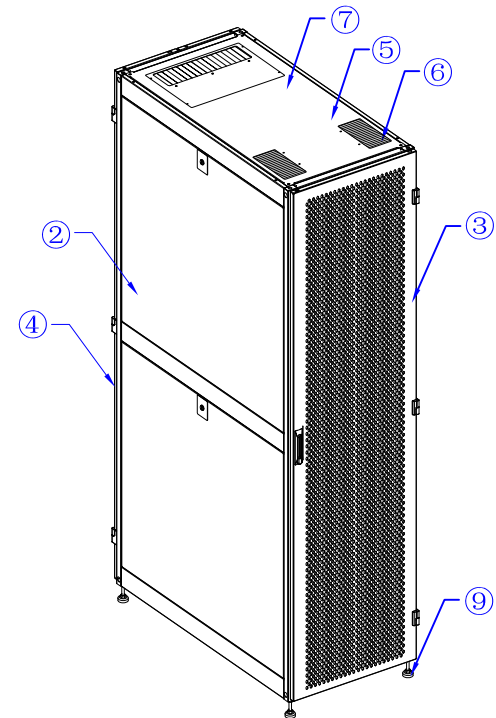


12	2	PDU Lacing Panels	Steel	18 gauge
11	4	Cage Hole Mounting Rails	Steel	14 gauge
10	4	2.5" Dia. Casters		
9	4	Adjustable Levelers		
8	2	Adjustable Bottom Panels	Steel	18 gauge
7	1	12.75" x 17" Removable Panel w/Brush	Steel	18 gauge
6	2	Brush Panel Cable Entry		
5	1	Top	Steel	18 gauge
4	1	Split Panel Mesh Rear Door (standard)	Steel	18 gauge
3	1	Full Panel Mesh Front Door (standard)	Steel	18 gauge
2	4	Removable Side Panels	Steel	16 gauge
1	N/A	Cabinet Frame	Steel	18 gauge
NO	QTY	NAME	MATERIAL	THICKNESS

ITEM NO.		VC5-6248-ABS1A		VERICOM	
DESCRIPTION		48U x 48"D SERVER CABINET			
DATE	SCALE	SHEET	REV		
11/29/23	none	1 of 2	2		



All dimensions in inches [mm]

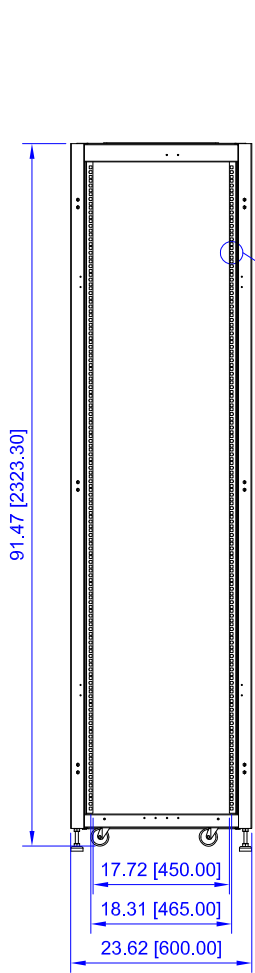

FRONT VIEW
(NO DOOR)

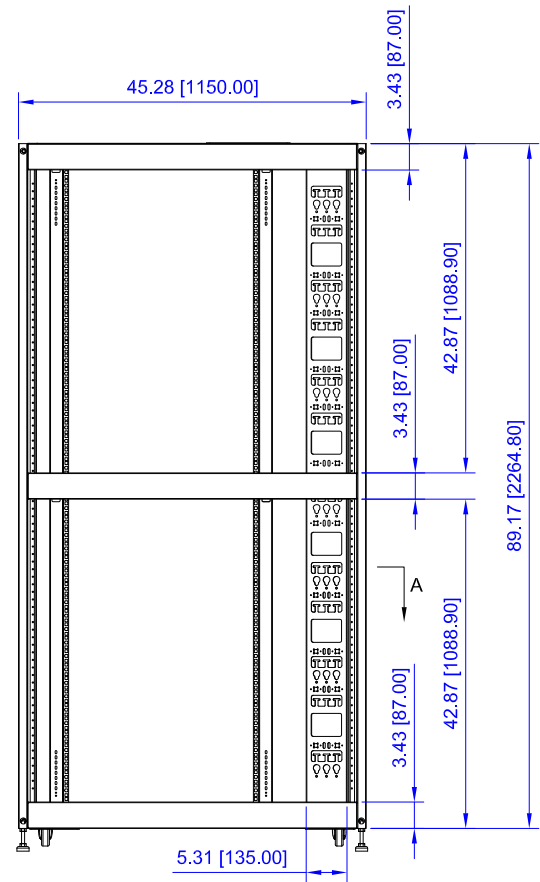

SIDE VIEW
(NO SIDE PANELS)

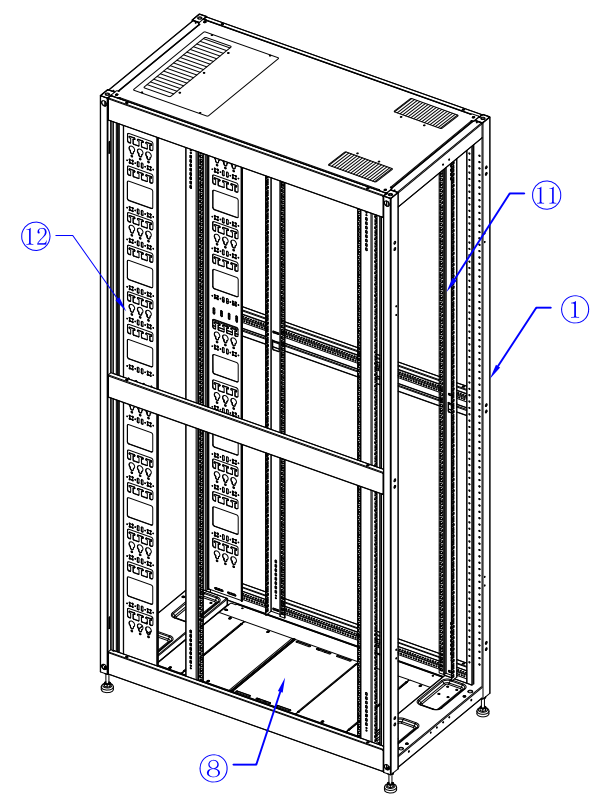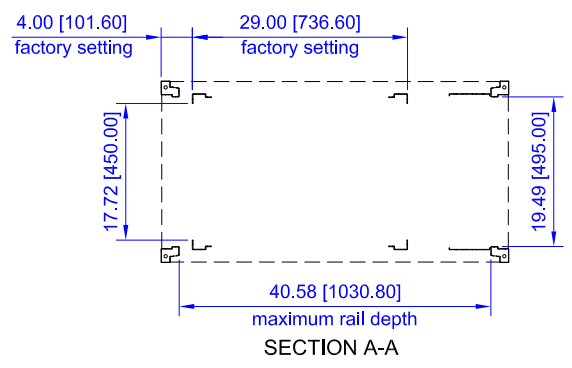

All dimensions in inches [mm]

ITEM NO.	VC5-6248-ABS1A		VERICOM®		
DESCRIPTION	48U x 48"D SERVER CABINET				
DATE	11/29/23	SCALE	none	SHEET	2 of 2
				REV	2