

VERICOM®



**Basic Rack Mount PDU - 30A, 200-240V,
5.7kW w/IEC C13**




Description

Vericom Basic Rack Mount PDUs distribute reliable power to IT equipment in a wide variety of applications where intelligence and/or remote monitoring are not required.

VPB-L631213H features (12) IEC C13 outlets protected by a pair of hydraulic magnetic circuit breakers and a durable anodized aluminum chassis. A 10 ft power cord with a NEMA L6-30P twistlock plug connects to an external power supply, while the versatile mounting design allows outlets to face the front or back.

Product Features

- 12 C13 outlets
- Dual 20A 2 pole hydraulic magnetic circuit breakers
- Switchless design prevents accidental shutdowns
- Includes 19W" EIA mounting brackets that allow outlets to face the front or back
- Conforms to UL 60950-1 and is RoHS compliant

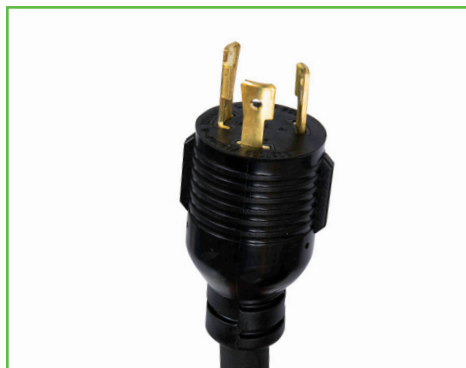



Basic Rack Mount PDU - 30A, 200-240V, 5.7kW w/IEC C13

OVERVIEW	
Item Number	VPB-L631213H
PDU Type	Basic
Form Factor	Horizontal (1U)
UPC Code	846788117314
OUTPUT	
Rated Output Voltage	208V Single Phase
Output Receptacles	(12) IEC C13
Overload Protection	(2) 20A Magnetic Hydraulic Circuit Breakers
INPUT	
Rated Input Voltage	200-240V Single Phase
Max. Input Current	30A
Frequency	50/60 Hz
Power Capacity	5.7 kW
Plug Type	NEMA L6-30P Twistlock
Cord Type	10/3 AWG
Cord Length	10 ft (3.05 meters)
PHYSICAL	
Unit Width	16.94 inches (430.4mm)
Unit Height	1.7 inches (44.0mm)
Unit Depth	4.33 inches (110mm)
Unit Weight	7.7 lbs (3.5 kgs)
Shipping Length	20.4 inches (518.2mm)
Shipping Width	8.5 inches (215.9mm)
Shipping Height	2.9 inches (73.66mm)
Shipping Weight	8.2 lbs (3.7 kgs)
Chassis Material	Anodized Aluminum (black)
Mounting Options	19 inch EIA 2-way mounting brackets
ENVIRONMENTAL	
Operating Temperature	30° to 140° F (0° to 60° C)
Operating Relative Humidity	0 - 95%
Operating Elevation	0 - 13,123 ft (4,000 meters)
SPECIAL FEATURES	
Breaker Reset	(2) switches on back
COMPLIANCE	
Certifications	Tested to conform to UL 60950-1; IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013: CB Scheme RoHS
Warranty	2-year limited warranty