




## Basic Rack Mount PDU - 30A, 200-240V, 4.9kW w/IEC C13 & C19

### Description

Vericom Basic Rack Mount PDUs distribute reliable power to IT equipment in a wide variety of applications where intelligence and/or remote monitoring are not required.

**VPB-L633039V** features (24) IEC C13 and (6) IEC C19 outlets protected by a pair of hydraulic magnetic circuit breakers and a durable anodized aluminum chassis. A 10 ft power cord with a NEMA L6-30P twistlock plug connects to an external power supply, while the versatile mounting design allows outlets to face any of three directions.

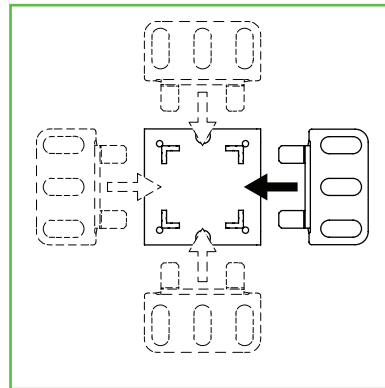

### Product Features

- 24 C13 and 6 C19 outlets
- Dual 20A 2 pole hydraulic magnetic circuit breakers
- Switchless design prevents accidental shutdowns
- Includes button mounts for vertical mounting to Vericom network and server cabinets, toolless mounting brackets that allow outlets to face the front, rear, or side, and additional brackets for mounting to rack rails.
- Conforms to UL 60950-1 and is RoHS compliant

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20201014.01



## Basic Rack Mount PDU - 30A, 200-240V, 4.9kW w/IEC C13 & C19

OVERVIEW	
Item Number	VPB-L633039V
PDU Type	Basic
Form Factor	Vertical (zero U)
UPC Code	846788117352
OUTPUT	
Rated Output Voltage	208V Single Phase
Output Receptacles	(24) IEC C13 + (6) IEC C19
Overload Protection	(2) 20A Magnetic Hydraulic Circuit Breakers
INPUT	
Rated Input Voltage	200-240V Single Phase
Max. Input Current	30A
Frequency	50/60 Hz
Power Capacity	4.9 kW
Plug Type	NEMA L6-30P Twistlock
Cord Type	10/3 AWG
Cord Length	10 ft (3.05 meters)
PHYSICAL	
Unit Width	48.5 inches (1232mm)
Unit Height	2.2 inches (55mm)
Unit Depth	2.2 inches (55.4mm)
Unit Weight	9.3 lbs (4.2 kgs)
Shipping Length	60.0 inches (1,524mm)
Shipping Width	6.3 inches (160.0mm)
Shipping Height	4.5 inches (114.3mm)
Shipping Weight	11.8 lbs (5.4 kgs)
Chassis Material	Anodized Aluminum (black)
Mounting Options	1) Adjustable button mounts, 2) Adjustable right-angle mounting brackets, and 3) Toolless 4-way mounting brackets
ENVIRONMENTAL	
Operating Temperature	30° to 140° F (0° to 60° C)
Operating Relative Humidity	0 - 95%
Operating Elevation	0 - 13,123 ft (4,000 meters)
SPECIAL FEATURES	
Breaker Reset	(2) switches on back
COMPLIANCE	
Certifications	Tested to conform to UL 60950-1; IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013: CB Scheme RoHS
Warranty	2-year limited warranty