

VW8 Series Wall Mount Cabinet



Description

At 18" depth, our VW8 Series Wall Mount Cabinets are ideal solutions for small installations where space is limited and requirements for equipment storage is minimal.

These compact yet durable cabinets ship flat packed to minimize freight, are easy to assemble and install, and can support up to 132 lbs.

Benefits

Security & Protection

- Lockable doors and side panels prevent unauthorized access to equipment
- · Door is grounded to the cabinet frame

Flexibility

- Top panel is stamped for the addition of two fans
- Doors and side panels are removable for convenient access to equipment

Multi-Use

Adaptable for use in network, security and audio/video installations

Key Features

- Removable and Reversible Locking Front Door with 180° Swing (Available in Steel Mesh or Tempered Glass)
- Top and bottom panel each have a knock-out type cable entry holes
- Adjustable mounting rails can accommodate a wide range of equipment depths


TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20241030.6



VW8 Series Wall Mount Cabinet

Technical Illustration

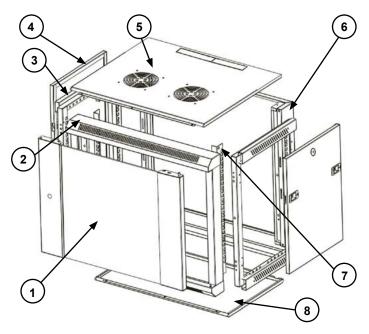

Product Specifications

Product Type: Fixed Wall Mount Cabinet

Frame Material: 19 Gauge Cold Rolled Steel (1.0mm)

Finish: Black Powder Coat

Dimensions (WxDxH): 22.4" x 17.7" x (see below)

Rack Unit Quantity: 6U, 9U, and 12U

Front Door: Removable and Reversible Locking Front Door with 180° Swing (Available in Steel Mesh or Tempered Glass)

Rear Panel: Wall Mounting Keyholes Spaced 16.0" Apart

Side Panels: Full Height, Lockable, and Removable

Top Panel: Optional Fans and Knock-Out Type Cable Entry Holes

Bottom Panel: Knock-Out Type Cable Entry Holes

Equipment Support: (2) Mounting Rails, 1.75" RU Spacing 19" W, EIA-310-D Universal Hole Spacing

Grounding: 14 AWG Ground Wire Connects Door To Cabinet Frame

Load Capacity: 132 lbs.

Included Accessories: (10) 10-32 Mounting Screws with (20) Washers, (3) Keys, (1) Grounding Wire Kit

Compliance & Standards: RoHS, ANSI/EIA RS-310D, IEC60297-2, DIN41494: Part 1, DIN41494: Part 7

Main Part

| S/N | Name | Quantity | Material | Surface |
|-----|--------------|----------|--------------------------|---------------|
| 1 | Front Door | 1 | 19 ga. Cold Rolled Steel | Powder Coated |
| 2 | Front Frame | 1 | 19 ga. Cold Rolled Steel | Powder Coated |
| 3 | Side Frames | 2 | 19 ga. Cold Rolled Steel | Powder Coated |
| 4 | Side Panels | 2 | 19 ga. Cold Rolled Steel | Powder Coated |
| 5 | Top Panel | 1 | 19 ga. Cold Rolled Steel | Powder Coated |
| 6 | Back Frame | 1 | 19 ga. Cold Rolled Steel | Powder Coated |
| 7 | Rails | 2 | 18 ga. Cold Rolled Steel | Powder Coated |
| 8 | Bottom Panel | 1 | 19 ga. Cold Rolled Steel | Powder Coated |

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20241030.6

RACK & CABINET SYSTEMS












VW8 Series Wall Mount Cabinet

Ordering Information

| Description | VW8 Series Wall Mount Cabinet | | | |
|-------------|-------------------------------|------------|-----------------------------|--|
| Item Number | Door Type | Rack Units | Dimensions (HxWxD) | |
| VW8-4061G | Tempered Glass Front Door | 6U | 14.6" H x 22.4" W x 17.7" D | |
| VW8-4091G | Tempered Glass Front Door | 9U | 19.7" H x 22.4" W x 17.7" D | |
| VW8-4121G | Tempered Glass Front Door | 12U | 25.0" H x 22.4" W x 17.7" D | |
| VW8-4121M | Steel Mesh Front Door | 12U | 25.0" H x 22.4" W x 17.7" D | |

Technical Drawing



TOP

