



UR2 Splice Connectors



Features & Benefits

- Suitable for commercial or residential splicing applications
- Terminates two or three 18-26 AWG solid copper or copper clad steel conductors
- Moisture resistant compound protects connection and resist corrosion
- Packaging: Bag of 100

Construction

Dimensions: 0.69" (17.6 mm) x 0.49" (12.5 mm) x 0.24" (6 mm)
Body & Lid Material: Non-toxic polypropylene
Body Color: Clear
Lid Color: Red
Inner Material: Moisture-Resistant Gel Compound

Mechanical

Wire Compatibility: 18 - 26 AWG Solid or Stranded
Maximum Insulation: 0.08" (2 mm)
Temperature Range: -22°F (-30°C) to 158°F (70°C)
Humidity Range: 0% to 95%

Ordering Information

Description	
UR2 Splice Connectors	
Item Number	Packaging
WCRSL-04552	Bulk (100 Per Bag)

Applications

These UR2 Splice Connectors are utilized in the security, safety, or communications fields to quickly and efficiently splice low voltage 2 or 3 conductor cables.


Description / Specifications

UR2 Splice Connectors provide a reliable connection for splicing applications. These splice connectors are composed of a non-toxic polypropylene transparent body and include a gel-filled internal compound to protect against corrosion damage caused by moisture. These connectors are suitable for splicing two or three 18 - 26 AWG solid copper or copper clad steel conductor wiring, and are available in a bag of 100.



UR2 Splice Connectors

Technical Illustration

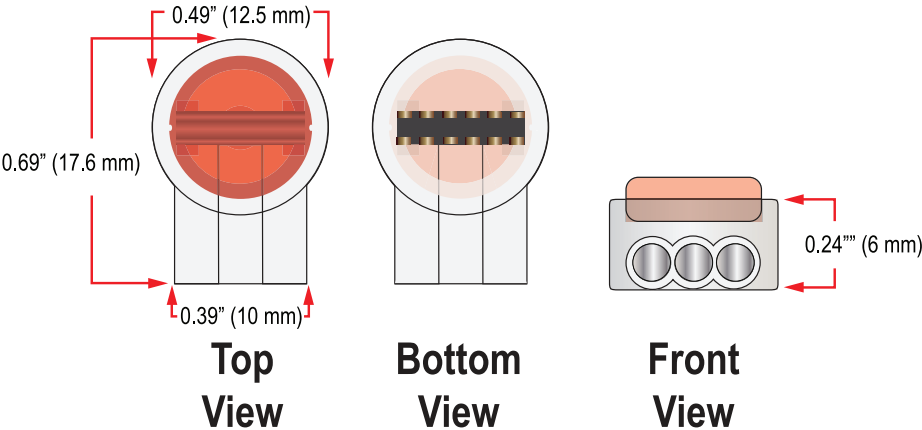

TECHNICAL SHEETS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

REV.20220721.3